

PCT/IL 04 / 00 0673



מדינת ישראל  
STATE OF ISRAEL

REC'D 26 AUG 2004

WIPO

PCT

IL04/673


Ministry of Justice  
Patent Office

משרד המשפטים  
לשכת הפטנטים

This is to certify that  
annexed hereto is a true  
copy of the documents as  
originally deposited with  
the patent application  
particulars of which are  
specified on the first page  
of the annex.

זאת לתעודה כי  
רצופים בזה העתקים  
נכונים של המסמכים  
שהופקדו לכתחילה  
עם הבקשה לפטנט  
לפי הפרטים הרשומים  
בעמוד הראשון של  
הנספח.

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

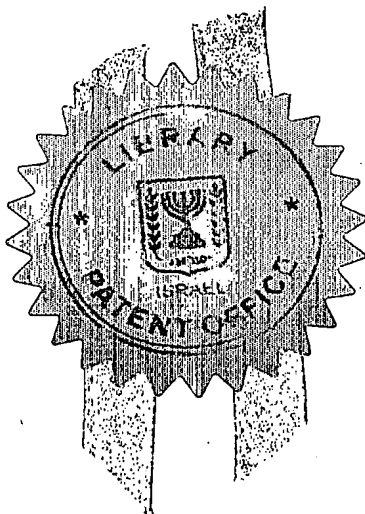

This 26-07-2004  
היום 26.7.2004  
מדינת ישראל  
לשכת הפטנטים

רשם הפטנטים

Commissioner of Patents

נתאשר  
Certified

לשימוש הלשכה  
For Office Use

מספר: Number	157246
תאריך: Date	05-08-2003
הוקדם/נדרחה: Ante/Post-dated	

**בקשה לפטנט**  
Application For Patent

אני, (שם המבקש, מענו ולגבי גוף מאוגד מקום התאגדותו)  
I, (Name and address of applicant, and in case of body corporate-place of incorporation)

נען - דן השקיה אגש"ח בע"מ, חברה ישראלית מקיבוץ נען 76829, ישראל  
Naan-Dan Irrigation Systems (C.S.) Ltd., Israeli Company of Kibbutz Na'an 76829, ISRAEL

שמה הוא  
of an invention the title of which is

Right of Law

הדין

בעל אמצאה מכח

Owner, by virtue of

ממטירון גיחה

Pop-up sprinkler

(בעברית)  
(Hebrew)

(באנגלית)  
(English)

Hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט

בקשת חלוקה Application of Division		בקשת פטנט מוסף Appl. for Patent of Addition		דרישת דין קדימה Priority Claim		
No.	מס'	No.	מס'	מספר/סימן Number/Mark	תאריך Date	מדינת האגוד Convention Country
Dated	מיום	Dated	מיום			
P.O.A.: filed in case		יפוי כח: הוגש בעניין				
C. 145541		המען למסירת מסמכים בישראל Address for Service in Israel				
REINHOLD COHN AND PARTNERS Patent Attorneys P.O.B. 4060, Tel-Aviv		ריינהולד כהן ושותפיו עורכי פטנטים ת"ד 4060, תל-אביב				
חתימת המבקש Signature of Applicant		שם המבקשים, ריינהולד כהן ושותפיו ע"י:		היום This 2003 שנת Year August בחודש of 4		
				לשימוש הלשכה For Office Use		

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הנו אישור לחגשת הבקשה שפרטיה רשומים לעיל.  
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

מחק את המיותר  
Delete whatever is inapplicable

ממטירון גיחה

Pop-up sprinkler

Naan-Dan Irrigation Systems (C.S.) Ltd.

נען-דן השקיה אגש"ח בע"מ

C. 145541

## POP-UP SPRINKLER

### FIELD OF THE INVENTION

This invention relates to sprinklers and more specifically to so-called pop-up or riser sprinklers where the irrigation head assembly is spontaneously displaceable responsive to water pressure, between a retracted opposition, namely a non-active position, and an extracted position, namely an active position.

### BACKGROUND OF THE INVENTION

A wide variety of pop-up sprinklers are known where a housing is typically buried under ground surface where the sprinkler is concealed for both aesthetic reasons and for practical ones, e.g. to facilitate easy lawn mowing, to prevent the sprinkler from being an obstacle to pedestrians, etc. In some cases a pop-up sprinkler is intended for increasing the irrigation range or for overcoming obstacles such as a bush, a decorative stone, a fence, etc. These objects are however achieved by a substantially large housing with a corresponding long pop-up stem member, requiring suitable sealing means.

A different type of pop-up sprinklers is of the kind comprising a membrane deformable between a retracted position and an elevated position, responsive to water supply pressure. Such sprinklers are described, for example, in U.S. Patents 3,282,508 to Bailey and 4,919,332 to Roberts.

It is an object of the present invention to provide a pop-up sprinkler fitted with an improved raising mechanism which on the one hand is inexpensive and easy to assemble and, on the other hand, offers many advantages such as compact structure, smooth and trouble-free operation, insect and dirt protection, inverted

installation ('top down'), etc. Furthermore, the sprinkler according to the present invention offers many diversities for various purposes. For example, the sprinkler may be integrally fitted with a flow control assembly and a leak preventing device, with an in-line filter, etc.

## 5 SUMMARY OF THE INVENTION

According to the present invention there is provided a sprinkler comprising a housing fitted with an inlet port connectable to a water supply line and extending into an inlet chamber, a hollow stem member having with an inlet end thereof being in flow communication with said inlet chamber and an outlet end thereof being in  
10 flow communication with an irrigation head; a diaphragm seal sealingly fixed at peripheral boundaries thereof to the housing and sealingly articulated to the stem member and supporting it at an essentially upright position; said diaphragm being deformable between a first position in which the irrigation head is retracted within the housing and a second position in which the irrigation head projects from the  
15 housing.

According to some embodiments of the invention, the diaphragm seal is beveled, however according to other embodiments the diaphragm seal may have other shapes. e.g. a flat disk, a conical disc, a gradually beveled disc, etc. However, where the diaphragm seal has a non-flat section (e.g. beveled/conical section -  
20 collectively referred to hereinafter as a *beveled* diaphragm seal), it offers some advantages.

A beveled diaphragm seal toggles into its respective first and second positions and according to a particular feature of the sprinkler of the present invention, the beveled diaphragm seal is substantially un-tensed at either of its two  
25 respective beveled positions. According to one specific arrangement, at its second beveled position the beveled diaphragm seal bears against a supporting surface where the beveled diaphragm seal bears against the inclined surface and under water pressure provides hydraulic seal.

When the diaphragm seal is beveled, it may be used to generate a biasing effect e.g. for sealing a leak preventing device (LPD) fitable at an inlet of the sprinkler.

Furthermore, axial displacement of the stem member is restricted to thereby  
5 restricting stress of the beveled diaphragm seal. Axial displacement restriction is obtained, for example, by a projecting shoulder of the stem member engageable with a corresponding bearing surface of the housing.

Furthermore, the housing is formed with a radial support to facilitate only  
axial (sliding) displacement of the stem member, thereby reducing generation of  
10 forces to the diaphragm seal.

According to the present invention, the sprinkler further comprises a cover member articulated to one of the stem member and the irrigation head, whereby the shielding portion is closable by said cover member at the first position. By one embodiment, the shielding portion is formed with one or more drain ports and still,  
15 the one or more drain ports are sealable at the first position. The arrangement according to one embodiment is such that at the second position a portion of the stem or of an articulated bridge portion displaces into sealing engagement with the one or more drain ports.

The sprinkler according to the present invention is formed, according to one  
20 of its embodiments, with a radial support to facilitate only axial displacement of the stem member. Such a radial support may be in the form of an annular neck portion or support ribs or segments, integrally formed with the housing or fixed thereto, slidably supporting the stem member.

According to another embodiment of the present invention the inlet chamber  
25 is fitted with a flow control assembly comprising a flexible membrane retained within the inlet chamber which responsive to pressure differential thereover is deformable to constrict the cross section area of a liquid flow path into the inlet end of the stem member.

The arrangement according to a particular application is such that at the first  
30 beveled position the flexible membrane bears against the inlet port, thus serving as

a leak preventing device, ensuring the inlet port is sealed until water pressure at the inlet port reaches a minimal nominal pressure.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

In order to understand the invention and to see how it may be carried out in practice, some embodiments will now be described, by way of non-limiting examples only, with reference to the accompanying drawings, in which:

**Figs. 1A-1C** are directed to a first embodiment of a sprinkler in accordance with the present invention wherein:

**Fig. 1A** is an exploded isometric view;

**Fig. 1B** is a sectional elevation of the sprinkler in the so-called closed position; and

**Fig. 1C** is a sectional elevation of the sprinkler in the so-called open position;

**Fig. 2A** is a longitudinal isometric section of the stem member useful in a sprinkler in accordance with the present invention;

**Fig. 2B** is a section along line II-II in Fig. 2A;

**Figs. 3A and 3B** are sectioned side views of a stem, bridge and irrigation head according to a modification of the invention, at an exploded view and an assembled view, respectively;

**Figs. 4A to 4C** are sectioned exploded side views illustrating three alternatives of applying an outlet nozzle in accordance with modifications of the embodiment of Fig. 1;

**Figs. 5A-5C** are directed to a sprinkler in accordance with a second embodiment of a sprinkler in accordance with the present invention, wherein:

**Fig. 5A** is an isometric exploded view of the sprinkler;

**Fig. 5B** is a longitudinal sectional view of the sprinkler in its closed position; and

**Fig. 5C** is a longitudinal section of the sprinkler in its open, pop-up position;

Fig. 6A-6C illustrate a sprinkler in accordance with still another embodiment of the irrigation present invention wherein:

Fig. 6A is a perspective exploded view of the sprinkler;

Fig. 6B is a longitudinal section of the sprinkler in the closed position; and

5 Fig. 6C is a longitudinal section of the sprinkler in the pop-up position;

Figs. 7A and 7B illustrate a sprinkler according to a modification of the invention, wherein:

Fig. 7A is a longitudinal section of the sprinkler at its closed/retracted position; and

10 Fig. 7B is a longitudinal section of the sprinkler at its open/operative position, rotated about 90° with respect to the presentation of Fig. 7A;

Figs. 8A and 8B illustrate a sprinkler according to still another a modification, wherein:

15 Fig. 8A is a longitudinal section of the sprinkler at its closed/retracted position; and

Fig. 8B is a longitudinal section of the sprinkler at its open/operative position.

## DETAILED DESCRIPTION OF THE INVENTION

Attention is first directed to Figs. 1A to 1C illustrating a pop-up sprinkler in accordance with the present embodiment generally designated 20. The sprinkler comprises a housing 22 fitted with a bottom cap 24 for screw engagement therewith, the latter comprising an inlet port 26 extending into an inlet chamber 30. In assembly of the sprinkler 20, the cap 24 screw clamps a beveled diaphragm seal 34 at a peripheral boundary rim 36, thus retaining the beveled diaphragm seal 34 in place within the housing.

25 The beveled diaphragm seal 34 is formed with a central aperture 38 wherein the inner peripheral boundaries 40 are annularly arrested within an annular groove 42 of a hollow stem member generally designated 44, supporting the latter in an essentially upright position such that an inlet end thereof 46 extends below the



beveled diaphragm seal 34 and an outlet end thereof 48 extends above the beveled diaphragm seal 34, as can be seen in Figs. 1B and 1C.

The annular groove 42 is formed between a first annular shoulder 50 and a second annular shoulder 52 with a coiled spring 56 having one end thereof bearing  
5 against annular support 52 with an opposed end thereof bearing against an opposite annular portion 58 of the housing 22, thus biasing the beveled diaphragm seal 34 and the associated stem 44 into a downward, retracted position as in Fig. 1B.

A bridge member 62 is screw coupled or otherwise articulated to the stem member 44 (e.g. by snap fitting etc.), said bridge 62 having a top cover portion 64  
10 sized and shaped to close a top opening 66 of housing 22. The bridge member 62 is fitted with a locking piece 68 engagable by means of arresting ribs 70A and 70B projecting from the bridge member 62 and the locking piece 68, respectively. A reactionary rotatable irrigation head 80 comprises an inlet portion 82 is rotatably received within a receptacle at the outlet end 48 of the stem member 44 and the  
15 head is formed with an axially projecting boss 86 rotatably supported within an opening 88 formed in the support piece 68, the arrangement being such that the irrigation head 80 is rotatably supported with little friction whereby it freely rotates owing to reactionary forces developing upon water flow about a reactionary surface 92 (Figs. 1B and 1C).

20 The beveled diaphragm seal 34 is normally at either of its beveled positions, i.e., a first position as in Fig. 1B when the irrigation head 80 is retracted and does not project from the housing 22, and a second position, as in Fig. 1C wherein the irrigation head projects from the housing in its operable position. The beveled diaphragm seal 34 is un-tensed at either of its two respective beveled positions. The  
25 diaphragm seal 34 comprises a normally beveled portion designated 92, with an annular resilient portion 94 extending between the peripheral portion 36 and the beveled portion 92, where deformation of the beveled diaphragm seal 34 occurs mainly about said annular resilient portion 94 in a toggle-fashion.

Furthermore, as seen in Figs. 1B and 1C, the housing 22 is formed with a  
30 diaphragm seal support portion 96 having a shape corresponding with that of the

beveled diaphragm seal 34 in its second position such that at said second position the diaphragm seal 34 bears against said surface 96 to ensure the diaphragm beveled seal 34 is not tensioned, as in Fig. 1C. This arrangement ensures that substantially no force or tension is applied to the beveled diaphragm seal and accordingly, a relatively thin and inexpensive such seal may be used. Bearing of the beveled diaphragm seal against the corresponding inclined surface 96 of the housing 22 also provides for hydraulic seal, increasing seal contact.

It is further noted that at the second position, the axial displacement of the stem member 44 is restricted by the annular projecting shoulder 52 encountering a corresponding shoulder 53 of the housing 22 to thereby prevent tensioning or stressing of the beveled diaphragm seal 34.

With particular reference to Figs. 1B and 1C, the housing 22 is formed with an annular support neck portion 57 for slidably supporting the stem member 44, allowing it to displace only in an axial direction without any tilt. Rather than the annular portion 57, there may be formed several ribs or segments (not shown) supporting the stem member.

As can further be seen in the figures, the housing 22 is formed with a shielding portion 98 which accommodates the irrigation head and which at the retracted position (Fig. 1B) is closed by means of bridge member 62. The shielding portion 98 is formed with two drain ports 100 (only one of which is seen in Fig. 1A). The arrangement is such that at the second position, namely the operative position of the sprinkler, the drain ports 100 are opened to ensure proper drain of the housing. However, when the sprinkler is in its retracted position, as in Fig. 1B, the drain ports 100 seal by means of a corresponding sealing portion 104 coming to rest against the drain ports 100. In this position the housing is sealed and protects the assembly from dirt and insects.

As can further be seen, the cap 24 is fitted with an extension piece 110 accommodating an integral filter 112 retained in place by a connecting piece 114 suited for pressure fit to a water supply tube (not shown). The cap member 24 is further formed with a support 116 for mounting on a post (not shown) at any

desired position either suspending from above at an inverted position (the bridge member 62 facing downwards) or at an upright position as in the figures.

Sprinkler 20 further comprises a flow control assembly generally designated at 120 comprising a flexible disc-like membrane 122 retained within the inlet chamber 30 by retention leg members 126 with an inlet opening 130 formed  
5 between the legs 126 to ensure flow communication about both faces of the membrane 132.

In use, the sprinkler is normally at its closed position as in Fig. 1B, wherein the beveled diaphragm seal 34 is at its first beveled position and the irrigation  
10 head 80 is retracted and does not project the housing 22, owing to the biasing effect of coiled spring 56 and the self weight of the assembly. However, upon introducing water pressure through inlet port 26, pressure develops within the inlet chamber 30 resulting in toggle deformation of the beveled diaphragm seal 34 into its second position (as in Fig. 1C) entailing corresponding displacement of the stem  
15 member 44 along with the associated irrigation head, whereby water flows through the lumen 136 of the stem member 44 flowing out through the outlet end 48 into the irrigation head 80 and causing it to rotate under influence of reactionary forces developing about reactionary surfaces 92 so as to radially admit water in the gap 140 formed between the cover portion 64 of bridge member 62 and a top  
20 edge 144 of the housing 22.

Upon ceasing the water supply through inlet port 26 the pressure within the inlet chamber 30 decreases and under influence of the coiled spring 56 the beveled diaphragm seal 34 toggles back into its first position (Fig. 1B) with the bridge member 62 closing the housing 22 and the drain ports 100 being sealed with  
25 corresponding portion 104 as discussed hereinabove.

The flow control assembly 120 acts as a differential pressure assembly wherein the membrane 122 deforms responsive to pressure differential between its inlet face and its outlet face to thereby vary the through flow into the inlet end 46 of the stem member 44, thereby restricting water flow therethrough.

The sprinkler disclosed hereinabove is of simple construction and is easy to assemble and disassemble for maintenance. Furthermore, an outlet nozzle of different nominal outlet flow may be fitted at an outlet end 48 of the stem member 44. For example, each nozzle may be of a different color corresponding with its nominal through-flow. The replaceable nozzles may have a nominal outlet flow of say between 25 to 200 liters/hour.

It is further appreciated that the beveled diaphragm seal 34 divides the housing into a pressurized zone at a side thereof facing the inlet port, and an essentially atmospheric pressure zone at its other side.

10 In Figs. 2A and 2B there is illustrated an alternative embodiment of a stem member in accordance with the present invention generally designated 160 being substantially similar to the stem member 44 referred to in Figs. 1A-1C with the exception that its lumen 162 is formed adjacent the outlet end 164 with a flow straightening/regulating arrangement 166 in the form of fins 168 (referred to in the art also as *straightening veins*) extending radially inwards for imparting the water flowing through the lumen 162 a regular smooth flow towards its outlet through the outlet end 164. The zone in the lumen 162 extending below the fins 168 is referred to as the 'quiet zone'.

It is also noted in Fig. 2A that the outlet end 164 of the stem member 160 is 20 formed with a receptacle suited for receiving the irrigation head (not seen) or a flow restricting nozzle, as discussed hereinbefore.

Diaphragm 122 of the flow control assembly 120 serves also as a leak preventing device (LPD) i.e. before build up of a minimal pressure, the diaphragm 122 bears against the nozzle end 131 of inlet port 26 (see Fig. 1B) in a 25 sealing manner.

The drain ports 100 are formed at a lower portion of the cone-like shielding portion 98, ensuring drainage of water therefrom.

Turning now to Figs. 3A and 3B there is illustrated only a portion of a sprinkler according to a modification of the embodiment of Figs. 1A to 1C and 30 accordingly like elements are given like reference numbers with a prime ('

indication. According to this modification, the stem member 44' is fitted at its outlet end 48' with a receptacle 49 rotatably receiving the irrigation head 80', the later comprising an inlet portion 82' rotatably received within receptacle 49, and at its opposite end there is formed a bore 81 rotatably receiving a corresponding boss 83, projecting from bridge member 62'.

Other arrangements are possible to, such as, for example, applying a rotation dampener (not shown) such as a silicone dampener fitted at either the bridge member or the irrigation head, as known *per se*.

In accordance with some other embodiments of the invention an outlet nozzle of the sprinkler may be fitted at different locations and at different combinations. A first example is illustrated in Fig. 4A, corresponding with the embodiment of Figs. 1A to 1C, where same elements are given same reference numbers. According to this embodiment the outlet nozzle 167 is formed integral with the stem member 48, by means of a narrowing portion thereof.

A second embodiment is illustrated in Fig. 4B, where stem member 169 is fitted with a threaded outlet end 170 for coupling thereto a bridge member 171 formed (integrally or fixedly attached thereto) with a nozzle 172 of specific nominal flow rate. The irrigation head 173 is formed with an axial projection 174 testable within a receptacle 175 of the bridge member 171, and further with an axial boss 176 rotatably supported by a locking piece 177 fastened to the bridge member 171.

According to the embodiment of Fig. 4B, it is apparent that the bridge member/cover generally designated 171 has in fact several different functions, namely:

- Sealing/closing the shielding portion of the housing;
- Serving as a bridge for supporting the irrigation head at an end thereof remote from the outlet nozzle (in several different configurations, as discussed above);
- Comprising the outlet nozzle;
- Rotatably supporting the irrigation head; and

- Sealing/closing draining ports of the housing at the first (retracted) position.

The irrigation head, as seen in the various embodiments of the present invention, is formed as part of the cover of the housing (integral therewith, or  
5 assembled thereto). Further, the irrigation head substantially does not axially displace with respect to the stem member and the cover, thereby retaining stability and bearing features.

It is appreciated that the bridge member may be articulated to the stem member in other versions, e.g. bayonet coupling, snap-type connection, etc.  
10 Furthermore, it is this arrangement makes it possible to provide bridge members each fitted with a nozzle having a different nominal flow rate, distinguishable from one another, e.g. by different colors of the bridge member.

Furthermore, the arrangement is such that the irrigation head substantially does not axially displace from the stem member between the respective position.

15 A third example is illustrated with reference to Fig. 4C where like elements are identified by same reference numbers as in Fig. 4B with a prime (') indication. According to this embodiment the stem member 169' is fitted at its outlet end 170' with a nozzle receptacle 187 for securely receiving a replaceable outlet nozzle 189. Bridge member 171' is screw coupled over the stem 169' and retains the  
20 replaceable outlet nozzle 189 in place. Bridge member 171' is formed with a receptacle 191 rotatably receiving the irrigation head 173', the later comprising an inlet portion 174' rotatably received within receptacle 191, and at its opposite end there is formed a boss 176' rotatably received within a corresponding receptacle of a locking piece 177' fastened to the bridge member 171.

25 It is preferable, however, that the flow rate of the outlet nozzles should correspond with the nominal performance of the flow control assembly and accordingly, it would be advantageous that there be provided indication means for such correspondence, e.g. matching colors or colored portions of the bridge and the housing, dedicated connections e.g. bayonet connections suitable for only one type  
30 of outlet nozzles, etc.

Further attention is now directed to Figs. 5A to 5C of the drawings directed to a different embodiment of the present invention, in this case concerned with a bridge-less sprinkler generally designated 180. Apart from the housing 182 being somewhat different in its general appearance, the sprinkler has practically the same components as of the previous embodiments and the main difference resides in the structure of the stem member and the irrigation head collectively are referred to at 186 comprising a stem member 188 which has an inlet and similar to that disclosed in connection with the embodiment of Figs. 1 and a shorter stem portion 190 fitted at its outlet end 192 with several inwardly projecting bulges 194 separated from one another by axial slots 196 imparting the structure some resilience.

An extension stem member 200 has a cylindrical portion 202 receivable within the outlet end 192 of stem member 88 and formed with an annular groove 204 snapingly engagable by projections 194.

Rotatably mounted on the extension stem member 200 there is a swivel 210, in the form of a rotary bushing, freely rotatable about a cylindrical outlet end 214 of the extension stem member and snapingly retained thereto by means of an inward radial projection 218 snapingly retained by a corresponding annular recess 220 formed on the extension stem member 200.

A reactionary rotatable sprinkler head 224 is formed with a disc-like cover 226 fitted for closing the shielding portion 228 of the housing 182 at the retracted position of the sprinkler (first beveled position) as seen in Fig. 5B, and further it comprises an engagement portion 232 fitted with an annular radial projection 234 snapingly engagable over an annular groove 236 of the swivel 210. The sprinkler head 224 is further formed with a reactionary water flow path 240 giving rise to generating rotary motion upon water flow through that surface.

At the retracted position (Fig. 5B) the beveled diaphragm seal 242 is in its first beveled position under biasing influence of coiled spring 246 in where the inlet port 248 is sealed by flexible diaphragm 250 of the flow control assembly, as explained in connection with the previous embodiment. However, upon introducing water pressure through the inlet port 248, the beveled diaphragm seal 242 toggles

into its second beveled position, as in Fig. 5C, resulting in corresponding axial displacement of the irrigation head assembly 246 into the position of Fig. 5C such that water emitted from the reactionary rotatable sprinkler head 224 can easily flow in the gap 250 between an edge 252 of housing 182 and the closing portion 226 of the sprinkler head 224.

The embodiment of Figs. 6A to 6C is also directed to a bridgeless sprinkler generally designated 266 and which is significantly similar to the embodiment of Figs. 5A-5C with the exception of the irrigation head assembly 267 directed to a different embodiment of articulating the reactionary rotatable sprinkler head 268 to the stem member 270. Accordingly, the reader is referred to the detailed description of the previous embodiments describing in detail the other components of the sprinkler.

The stem member 270 has a short outlet stem portion 272 fitted adjacent its outlet end with inwardly projecting radial snap segments 276 for snap engagement within an annular groove 278 of an extension stem member 280 having a cylindrical portion 282 received within the stem portion 272. Snapingly mounted on an opposite end of the extension stem member 280 there is fitted a swivel 286 snapingly engagable about an annular groove 288 of the extension stem member 280.

The swivel 286 is fitted with two axial projecting legs 290 each formed at its free end with a laterally projecting lug 292 suited for snapingly engagement within corresponding apertures 294 formed in a reactionary rotatable sprinkler head 268.

The arrangement is such that once the reactionary rotatable sprinkler head 268 is mounted on the swivel 286 it prevents the swivel from unintended disengagement from the extension stem member 280 in that it embraces the legs 290 though allowing sufficient freedom for the swivel to rotate about the extension stem member.

It is noticed that the sprinkler head 268 has two rotational degrees of freedom, i.e. one imparted by the swivel 286 freely rotatable about the extension stem member 280 and the other imparted by extension stem member 280 rotatable



within the stem member 270. It is further noticed that the snapping portions are typically non continuous thus being formed with grooves so as to dispose of dirt, sand grains, weeds, algae, etc.

A person versed in the art will appreciate that other aspects which have  
5 already been disclosed in connection with the first embodiment disclosed in Figs. 1 and 2 may just as well be applied also in the embodiments of Figs. 2 and 6 e.g. the flow control assembly, liquid preventing device (LPD), flow rectifier, stem support arrangement, etc.

It is further noticed, although not mentioned in connection with the  
10 embodiments of Figs. 5 and 6, that the beveled diaphragm disc, in its second beveled position (Figs. 5C and 6C, respectively) bear against corresponding support surfaces of the housing such that the beveled diaphragm seal is not tensed in this position.

Furthermore, whilst not illustrated, it is appreciated that the sprinklers in  
15 accordance with the embodiments of Figs. 5 and 6 may also be provided with draining ports which may or may not be sealed in the retracted position.

Further attention is now directed to the embodiment of Figs. 7A and 7B, illustrating a rotary sprinkler 300, where the housing comprises a base member 302 screw coupled to a body portion 304 of the housing, clampingly securing a first  
20 rimmed edge 308 of a ziggurat-like diaphragm seal 310, where a second rimmed edge 314 thereof is securely retained to a stem member 316 by a fastener 318. The body portion 304 of the housing comprises an inner surface 320 corresponding in shape and dimensions with that of the diaphragm seal 310, to thereby support it at the extracted/operative position (Fig. 7B), thereby substantially eliminating tension  
25 force within the diaphragm seal 310 as already explained herein before.

It is further noted that the diaphragm seal 310 in its first position (Fig. 7A) resembles a bellows, which upon deformation to its second position (Fig. 7B) substantially does not undergo elastic deformation. It is seen that the diaphragm seal comprises first portions 324 (substantially vertically extending in both  
30 positions), and second, inclined portions 328 where deformation between positions

is particularly by change of inclination of the inclined portions 328, however without tensioning thereof.

Stem member 316 is supported within the housing 304 and is restricted to axial displacement only, by means of annular support 330 (which as already  
5 mentioned hereinabove may be in the form of radial fins, sectorial segments, etc). Furthermore, there is a coiled spring 333 biasing stem member 316 and it's associated irrigation head 336 into the retracted/closed position (Fig. 7A). In this position seal 338 of the flow control assembly 340 sealingly engages the inlet port 342 formed at the base member 302 of the housing, thus serving as a leak  
10 preventing device (LPD). Also noted, the housing 304 is formed with an axial displacement restricting portion 342 in the form of an annular shoulder, which restricts axial displacement of the stem 316 and thus of the diaphragm seal 310, to thereby substantially prevent tensioning thereof in the second, operative position (Fig. 7B).

15 Another application of the invention is illustrated in Figs. 8A and 8B of the drawings directed to a rotary sprinkler 380, being similar to the construction of the sprinkler 300 of Figs. 7A and 7B, apart from the diaphragm seal 386.

In the present embodiment the diaphragm seal 386 is clamped at a first rimmed portion 388 between a seat 390 of the housing 392 and a screw coupled base  
20 member 294. A rimmed portion 398 at an opposite end of the diaphragm seal 386 is secured to the stem member 400 and retained by a retention ring 404.

Other components of the sprinkler 380 are similar as those described in connection with sprinkler 300 of Figs. 7A and 7B, however with the exception that the diaphragm seal 386, in its first position, namely the retracted position of Fig.  
25 8A, is pre-tensed to thereby apply a biasing force to retract the stem member 400 and the components articulated thereto, whilst at the second position, namely the operative position as in Fig. 8B, the diaphragm seal 386 is tensed and deformed under water pressure to facilitate displacement of the stem into the second position. This arrangement obviates the need to provide a biasing spring as in some of the  
30 previous embodiments, for retracting the sprinkler into the retracted, first position.

In the position of Fig. 8B an annular shoulder 412 of the stem member 400 bears against a corresponding stopper shoulder 414 of the housing 392, to thereby restrict its axial displacement.

Whilst in the position of Fig. 8B the diaphragm seal 386 does not bear  
5 against the corresponding wall portion of the housing, this can easily be achieved by forming a suitable indentation for accommodating the retention ring 404.

Part for the above differences, operation of the sprinklers 300 and 380 illustrated in Figs. 7A; 7B and 8A; 8B, respectively, is similar to that disclosed in connection with the previous embodiments and reference is made to the relevant  
10 passages of the specification. Other components and structural features of the sprinkler, may be similar to those already disclosed hereinabove, e.g. flow/pressure control assembly, drain ports, type of irrigation head (i.e. static, rotational, bridge or bridgeless, dampened, etc), mounting, flow straitening fins (337 in Fig 7A) etc.

It is appreciated that the above descriptions are intended only to serve as  
15 examples and that many other embodiments are possible, all of which fall within the spirit and the scope of the present invention. For example, the irrigation head may be static or rotational, there may be provided dampening means, etc.

**CLAIMS:**

1. A sprinkler comprising a housing fitted with an inlet port connectable to a water supply line and extending into an inlet chamber, a hollow stem member with an inlet end thereof being in flow communication with said inlet chamber and an  
5 outlet end thereof being in flow communication with an irrigation head; a diaphragm seal sealingly fixed at peripheral boundaries thereof to the housing and sealingly articulated to the stem member and supporting it at an essentially upright position; said diaphragm being deformable between a first position in which the irrigation head is retracted within the housing and a second position in which the  
10 irrigation head projects from the housing.
2. A sprinkler according to claim 1, wherein the stem member and the irrigation head are axially displaceable within the housing, respective to deformation of the diaphragm seal.
3. A sprinkler according to claim 1, where the diaphragm seal is a beveled  
15 annular disc made of an elastic material.
4. A sprinkler according to claim 1, wherein the housing comprises a shielding portion accommodating at least a portion of the stem member, and the irrigation head.
5. A sprinkler according to claim 4, further comprising a cover member  
20 articulated to one of the stem member and the irrigation head, whereby the shielding portion is closable by said cover member at the first position.
6. A sprinkler according to claim 4, wherein the shielding portion is formed with one or more drain ports.
7. A sprinkler according to claim 6, wherein the one or more drain ports are  
25 sealed at the first position.
8. A sprinkler according to claim 7, wherein at the first position a portion of the stem or of an articulated bridge portion displaces into sealing engagement with the one or more drain ports.

9. A sprinkler according to claim 1, being a rotary sprinkler fitted with a reactionary rotatable sprinkler head.

10. A sprinkler according to claim 9, wherein the sprinkler head is formed with an axial boss rotatably received within a corresponding bushing receptacle formed  
5 at a top of a bridge member articulated to the stem member.

11. A sprinkler according to claim 9, wherein a bridge member articulated to the stem member is formed with an axial boss rotatably received within a corresponding bushing receptacle formed the sprinkler head.

12. A sprinkler according to claim 9, wherein the stem member is fitted at its  
10 outlet end with a swivel member supporting the rotatable sprinkler head.

13. A sprinkler according to claim 12, wherein the swivel member is articulated over the outlet end of the stem member by a snap-type engagement.

14. A sprinkler according to claim 1, wherein the irrigation head is bridgeless.

15. A sprinkler according to claim 14, wherein the irrigation head is fitted over  
15 a swivel freely rotatable over the outlet end of the stem member.

16. A sprinkler according to claim 15, wherein the irrigation head is attached to the swivel by a snap-type engagement.

17. A sprinkler according to claim 16, wherein the swivel is retained over the stem member by a snap-type engagement and where the irrigation head is snappingly  
20 mounted over the swivel to prevent spontaneous detachment thereof.

18. A sprinkler according to claim 1, wherein the inlet port is fitted with a filter.

19. A sprinkler according to claim 1, wherein the inlet chamber is fitted with a flow control assembly.

25 20. A sprinkler according to claim 19, wherein the flow control assembly comprises a flexible membrane retained within the inlet chamber which responsive to pressure differential thereover is deformable to constrict the cross section area of a liquid flow path into the inlet end of the stem member.

21. A sprinkler according to claim 19, wherein the flow control assembly is  
30 axially displaceable along with the stem member.

22. A sprinkler according to claim 20, wherein at the first position the flexible membrane bears against the inlet port, thus serving as a leak preventing device, ensuring the inlet port is sealed until water pressure at the inlet port reaches a minimal nominal pressure.

5 23. A sprinkler according to claim 1, fitted with a differential pressure control assembly comprising a deferential pressure membrane received within the inlet chamber and supported adjacent the inlet end of the stem member, wherein said membrane deforms responsive to pressure deferential between an inlet face thereof and an outlet face thereof to thereby vary a through-flow path into said inlet end of  
10 the stem.

24. A sprinkler according to claim 1, wherein the diaphragm seal divides the housing into a pressurized zone at a side thereof facing the inlet port, and an essentially atmospheric pressure zone at its other side.

25. A sprinkler according to claim 1, wherein the housing is suitable for  
15 suspending at an inverted position with the inlet port up and the irrigation head down.

26. A sprinkler according to claim 1, wherein the diaphragm seal is biased into its first position.

27. A sprinkler according to claim 1, wherein the diaphragm seal is biased by a  
20 coiled spring bearing at a first end against a portion of the housing and at a second end against a portion of the stem member.

28. A sprinkler according to claim 1, wherein at its second position the diaphragm seal bears against a corresponding supporting surface of the housing.

29. A sprinkler according to claim 1, wherein the diaphragm seal is sealingly  
25 retained over an annular grove of the stem member.

30. A sprinkler according to claim 1, wherein the stem member has an inlet portion thereof extending into the inlet chamber for supporting a flexible diaphragm which responsive to pressure differential is deformable to constrict a cross section area of a liquid flow path into the inlet end of the stem member.

31. A sprinkler according to claim 1, wherein the diaphragm seal is substantially un-tensed at either of its two respective positions.

32. A sprinkler according to claim 1, wherein the diaphragm seal is beveled.

33. A sprinkler according to claim 32, wherein the beveled diaphragm seal  
5 toggles into its respective first and second positions.

34. A sprinkler according to claim 32, wherein the beveled diaphragm seal comprises an outer peripheral portion for clamp engagement to the housing, an inner peripheral portion for annularly arresting the stem member, and a beveled portion intermediate said peripheral portions.

10 35. A sprinkler according to claim 34, wherein the beveled diaphragm seal comprises an annular resilient portion intermediate the outer peripheral portion and the beveled portion.

36. A sprinkler according to claim 1, wherein the diaphragm seal has a ziggurat-like shape.

15 37. A sprinkler according to claim 36, wherein the diaphragm seal comprises alternating first and second portions, said first portions being substantially vertical and said second portions being inclined.

38. A sprinkler according to claim 37, wherein said first portions remain substantially vertical at the first and second positions of the sprinkler.

20 39. A sprinkler according to claim 37, wherein at the second position at least said second portions bare against corresponding support portions of the housing.

40. A sprinkler according to claim 1, wherein the diaphragm seal has a bellows-like shape.

25 41. A sprinkler according to claim 1, wherein the diaphragm seal is an elastic member pre-tensed and biased into its first position.

42. A sprinkler according to claim 1, wherein axial displacement of the stem member is restricted by a shoulder of the stem member engageable with a corresponding bearing surface of the housing.

30 43. A sprinkler according to claim 1, wherein the housing further comprises an attachment for articulation to a support.

44. A sprinkler according to claim 1, wherein the outlet end of the stem member is fittable with replaceable nozzles, each having a different nominal flow rate.

45. A sprinkler according to claim 1, wherein the stem member is fitted,  
5 adjacent the outlet end thereof, with inwardly projecting radial flow straightening fins.

46. A sprinkler according to claim 1, wherein the stem member is supported within the housing in a fashion allowing only axial displacement thereof.

47. A sprinkler according to claim 1, wherein the housing is formed with a  
10 radial support to facilitate only axial displacement of the stem member.

48. A sprinkler according to claim 1, comprising a cover member serving for two or more of the functions comprising closing a shielding portion of the housing, serving as a bridge for supporting the irrigation head at an end thereof remote from an outlet nozzle, receiving the outlet nozzle, rotatably supporting the irrigation  
15 head, and closing draining ports of the housing at the first position.

49. A sprinkler according to claim 1, comprising a cover member supporting the irrigation head and fitted for closing the housing at the first position.

50. A sprinkler according to claim 1, comprising a cover member fitted with an outlet nozzle being in flow communication with the outlet end of the stem member.

20 51. A sprinkler according to claim 1, comprising a bridge member integrally fitted with an outlet nozzle being in flow communication with the outlet end of the stem member.

52. A sprinkler according to claim 1, wherein the irrigation head substantially retains its axial position with respect to the stem member, at the two respective  
25 positions.

53. A sprinkler comprising a housing fitted with an inlet port extending into an inlet chamber and comprising a beveled diaphragm seal having a first face thereof exposed to pressure within the inlet chamber and a second face exposed to atmospheric pressure; a stem member articulated to said beveled diaphragm seal  
30 and having an inlet end thereof extending into the inlet chamber and having an



outlet end articulated to an irrigation head; wherein the diaphragm seal is normally retained at a first toggle position where the sprinkler head is concealed within the housing, and where water pressure within the inlet chamber deforms the beveled diaphragm seal into a second toggle position where the sprinkler head axially  
5 displaces and projects from the housing.

For the Applicants,

**REINHOLD COHN AND PARTNERS**

By:

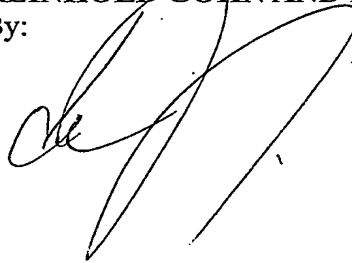
A handwritten signature in black ink, appearing to be 'R. Cohn', written over the printed name 'REINHOLD COHN AND PARTNERS'.

Fig 1A


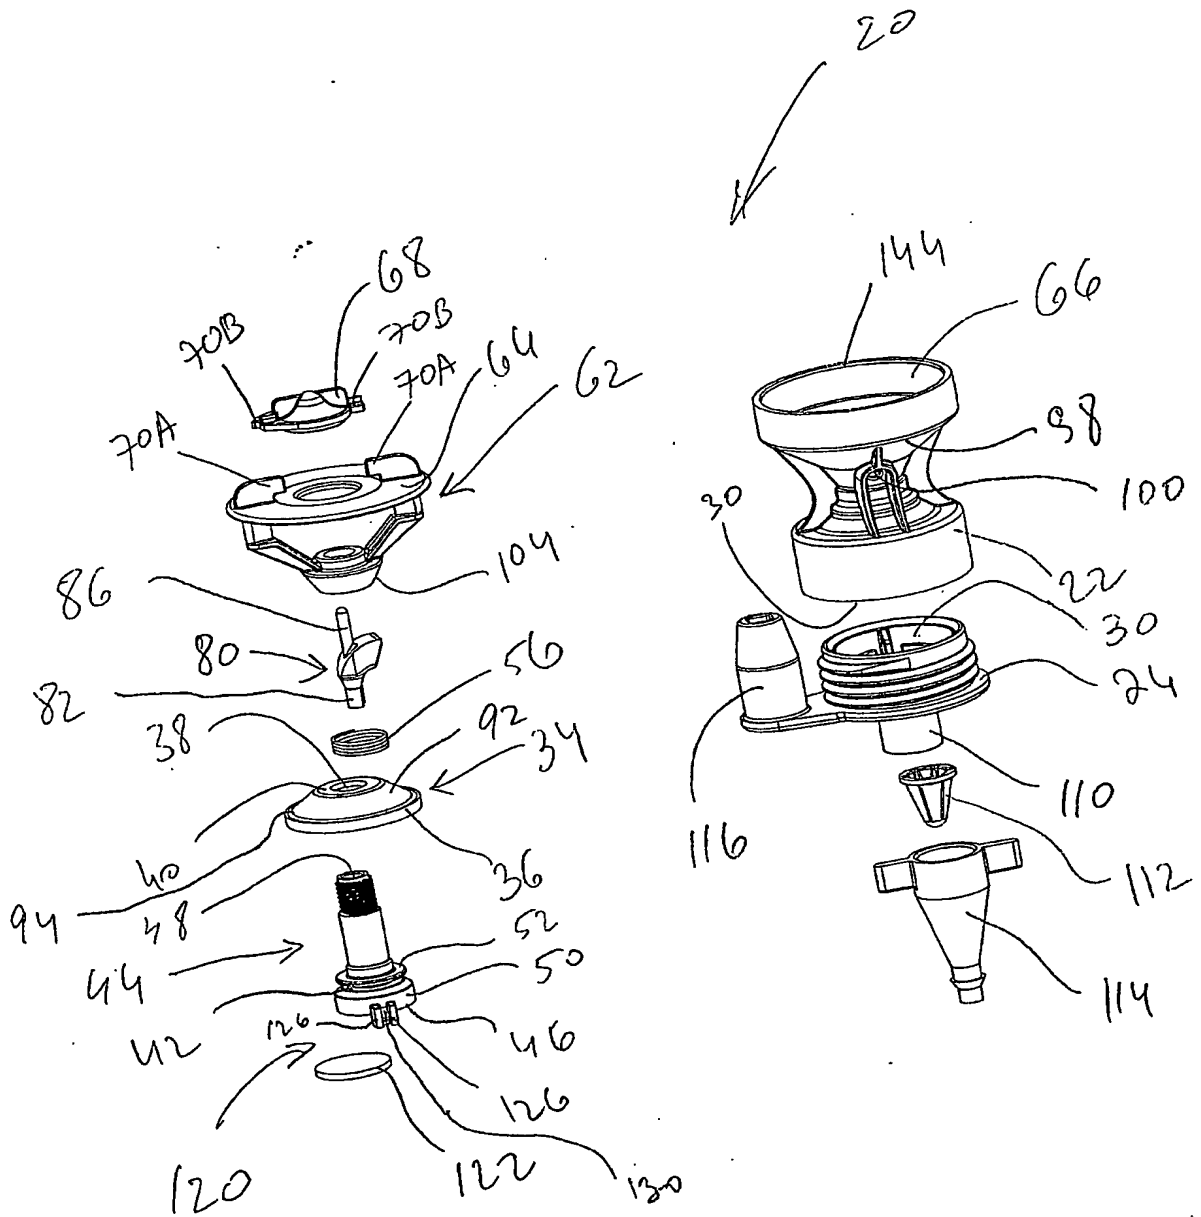


Fig. 1B

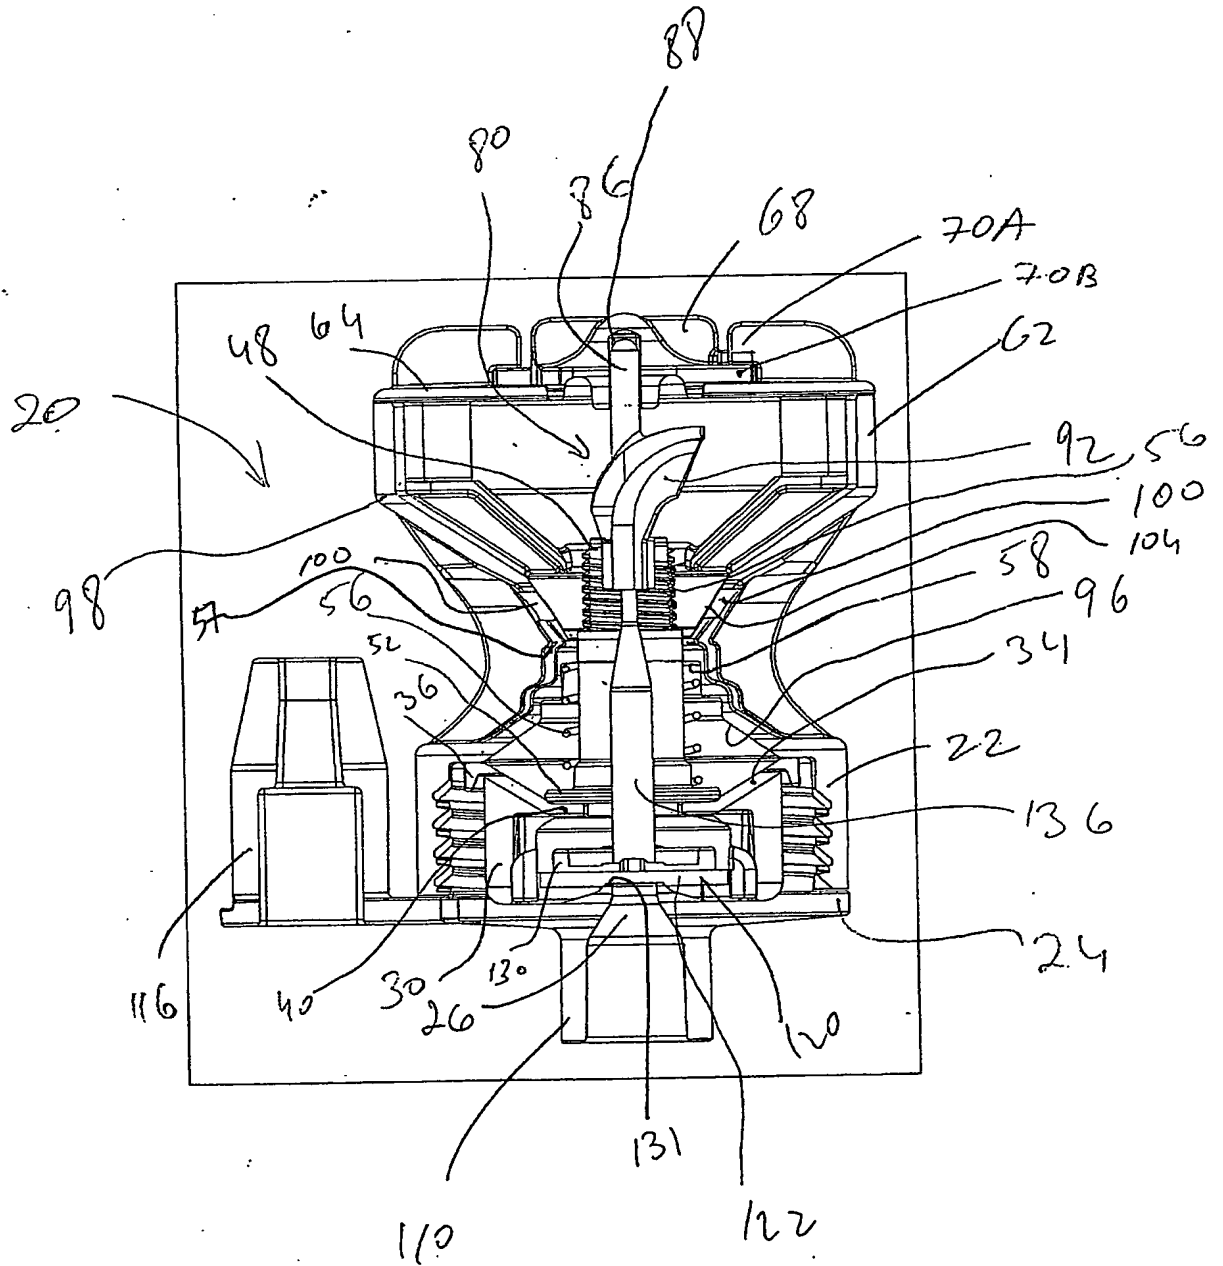

ES AC

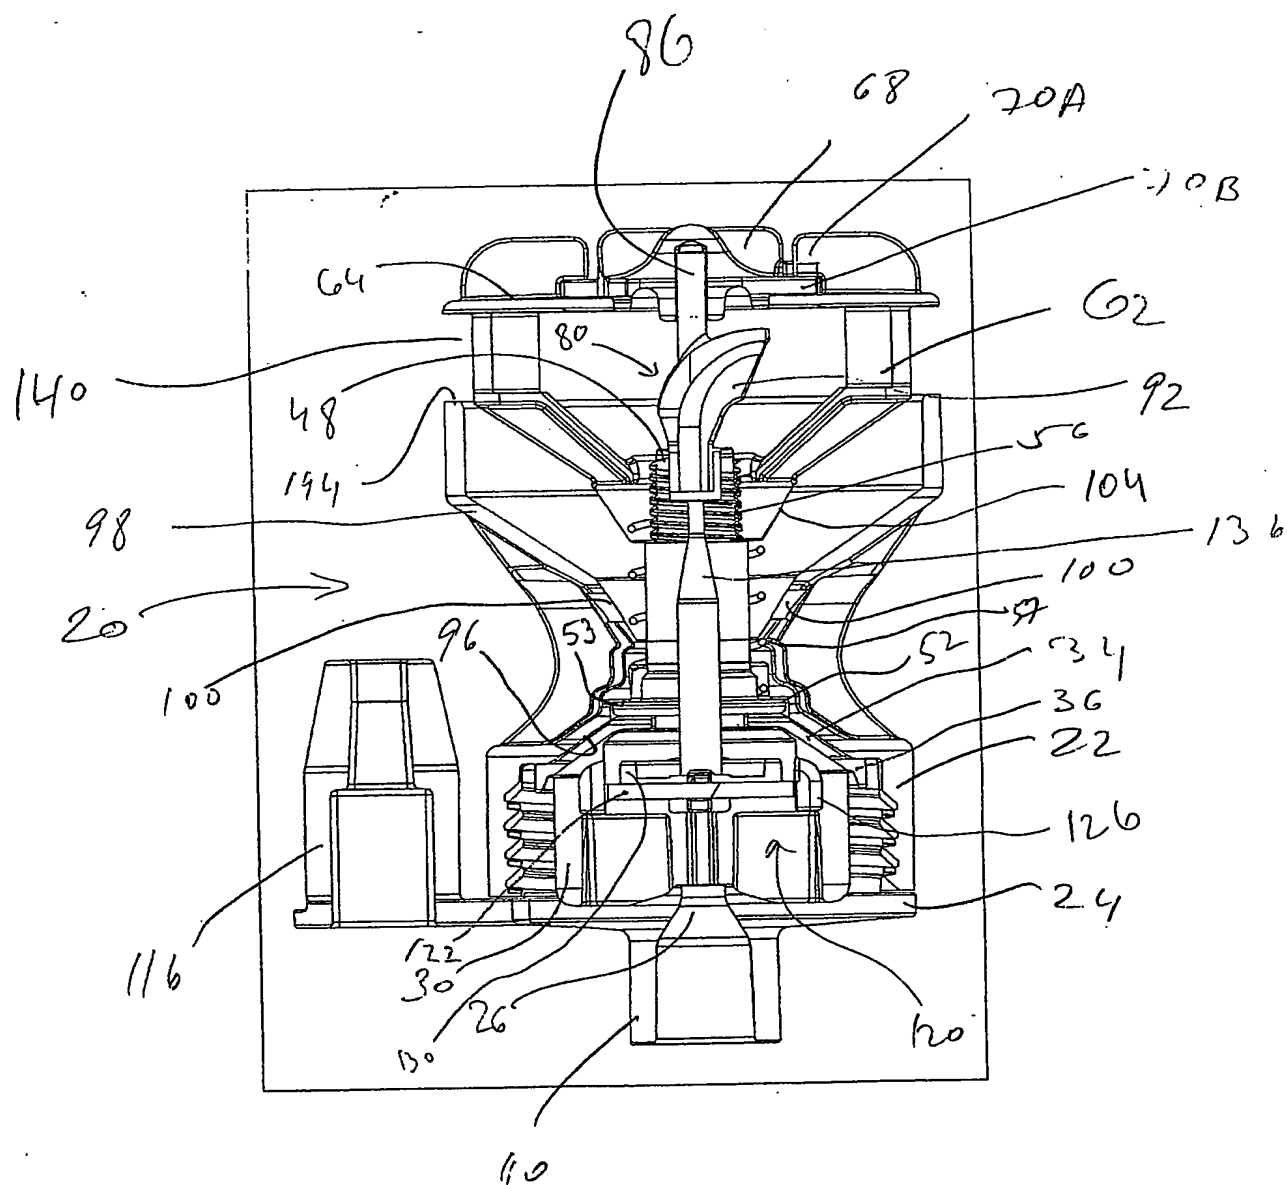


Fig. 2A

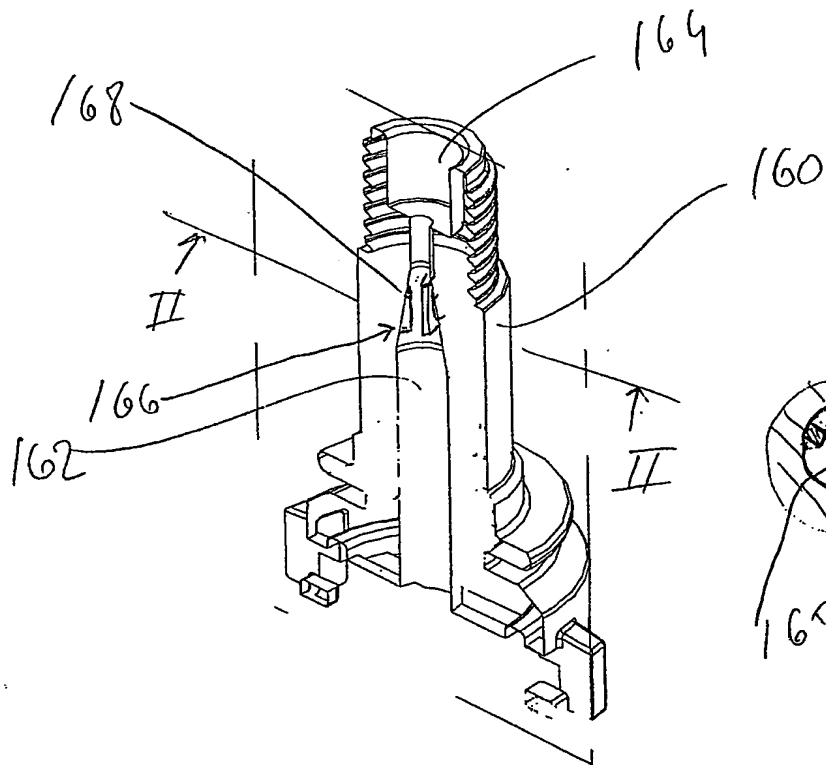
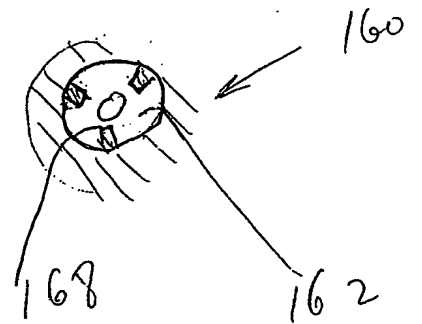


Fig. 2B



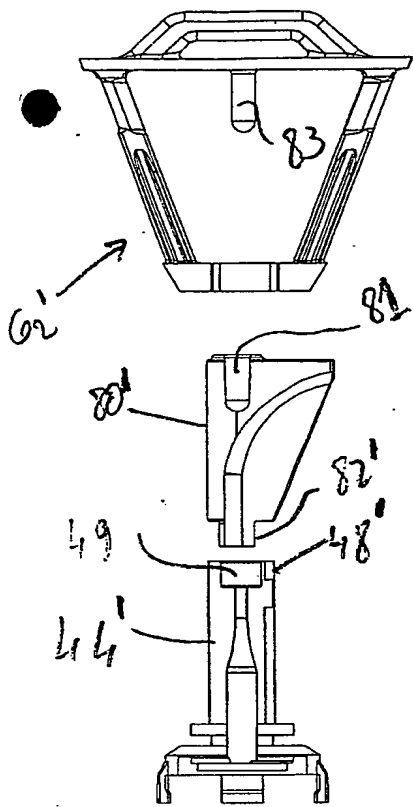


FIG. 3A

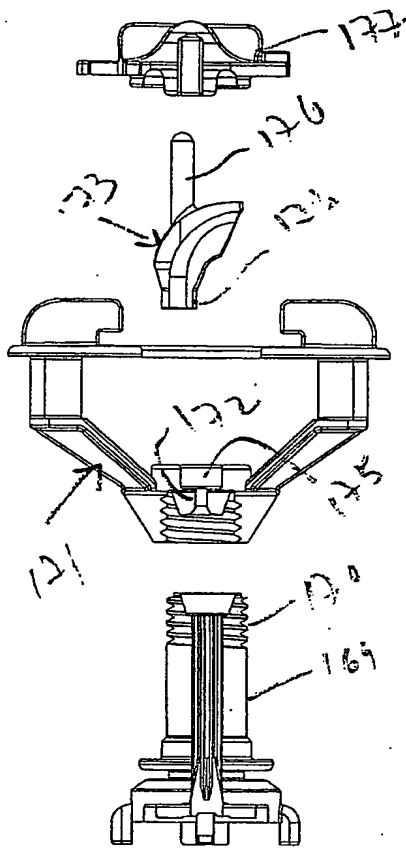


FIG. 4B

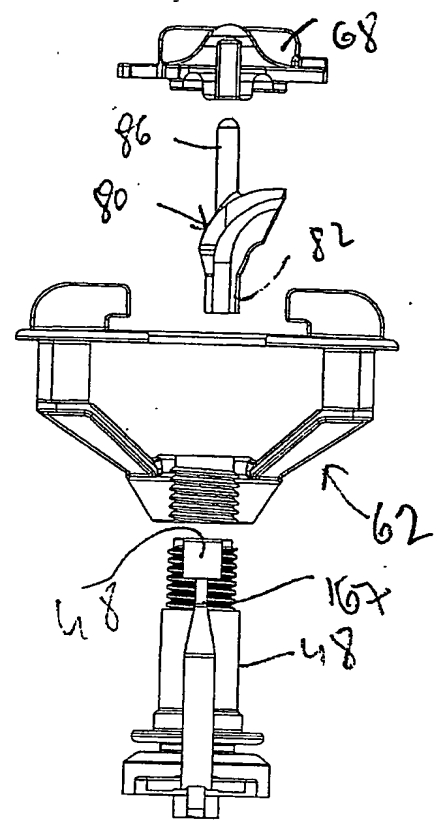


FIG. 4A

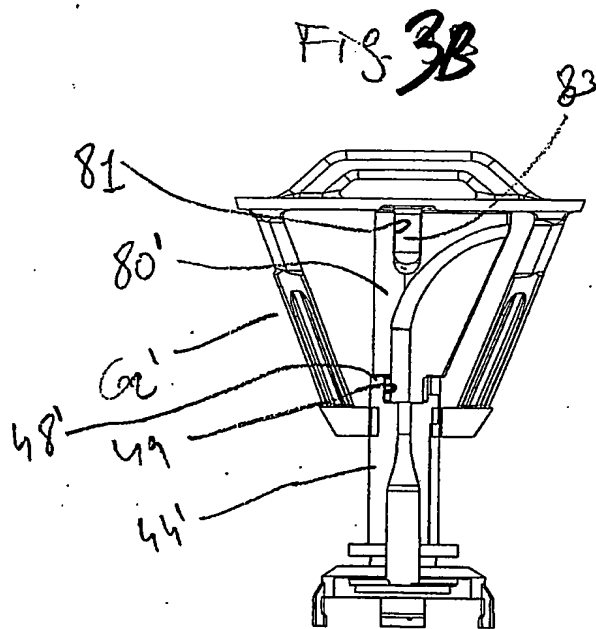


FIG. 3B

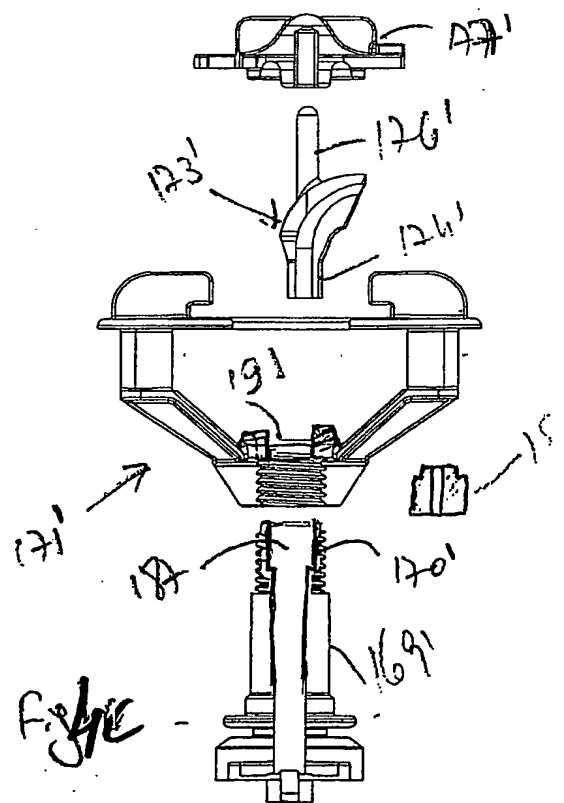


FIG. 4C

Fig. 2A

5A

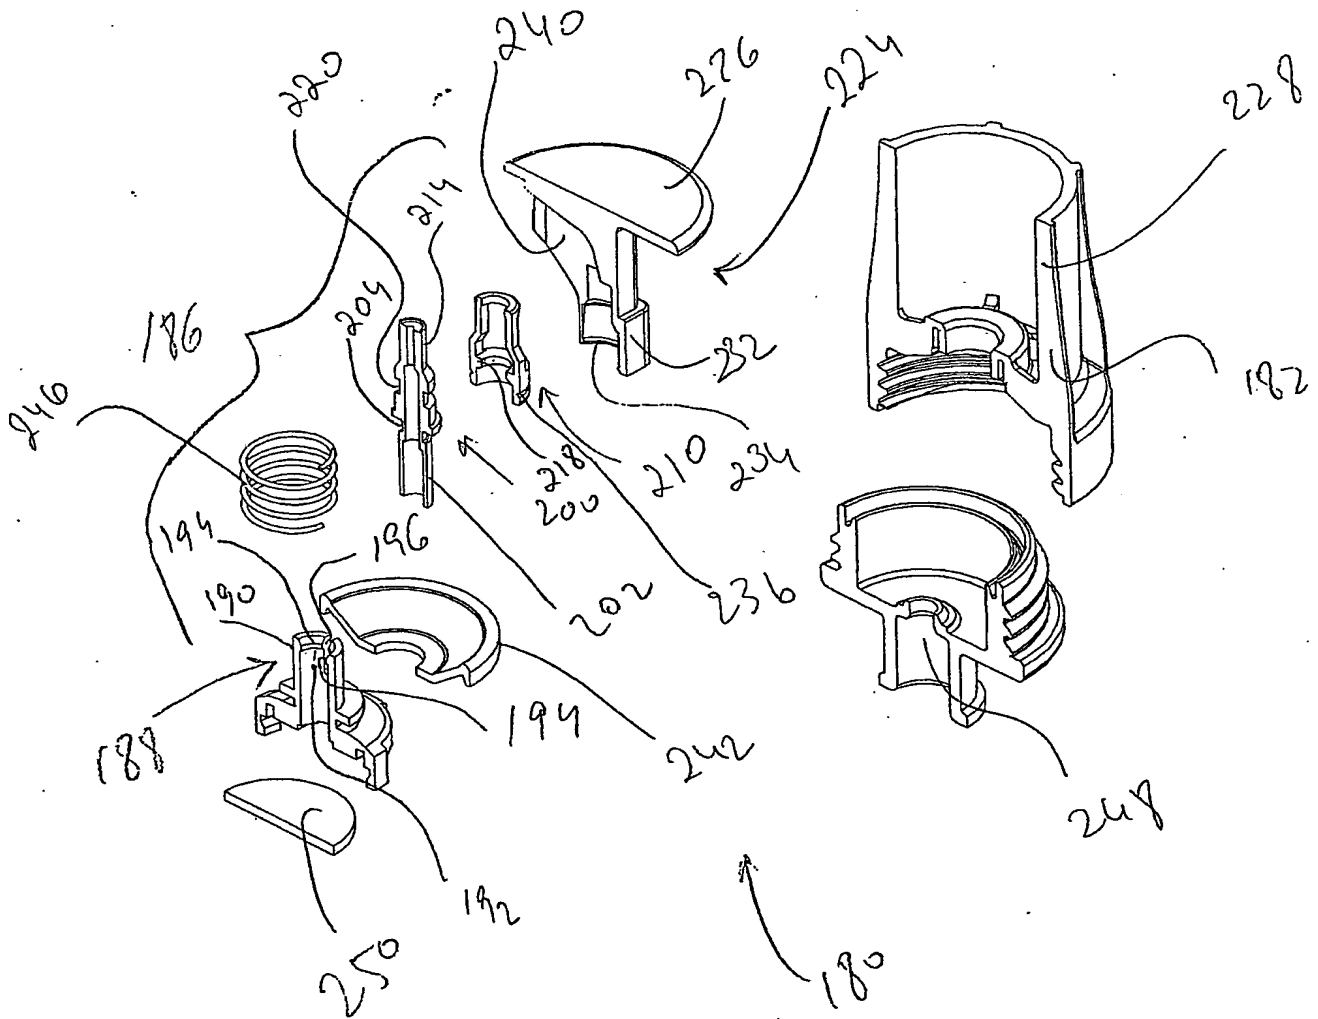


Fig. ~~3A~~ 5B

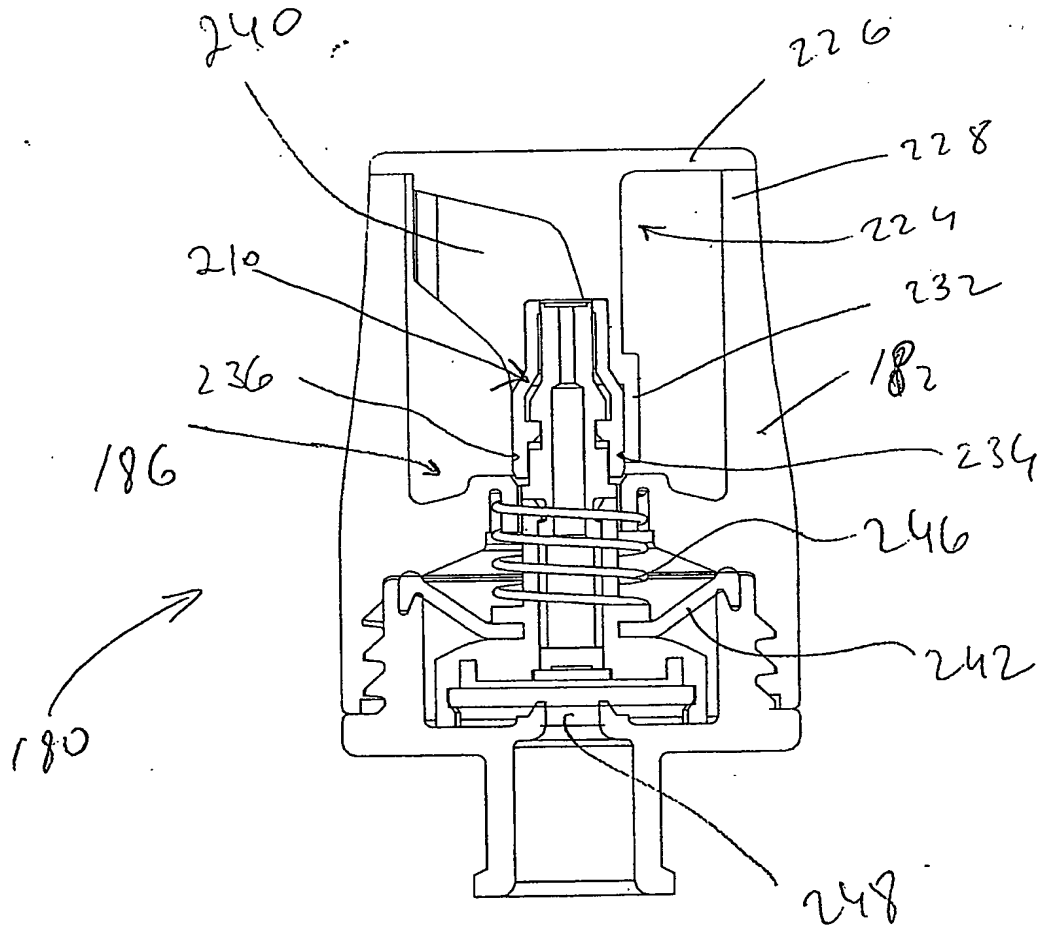




Fig. 31 50

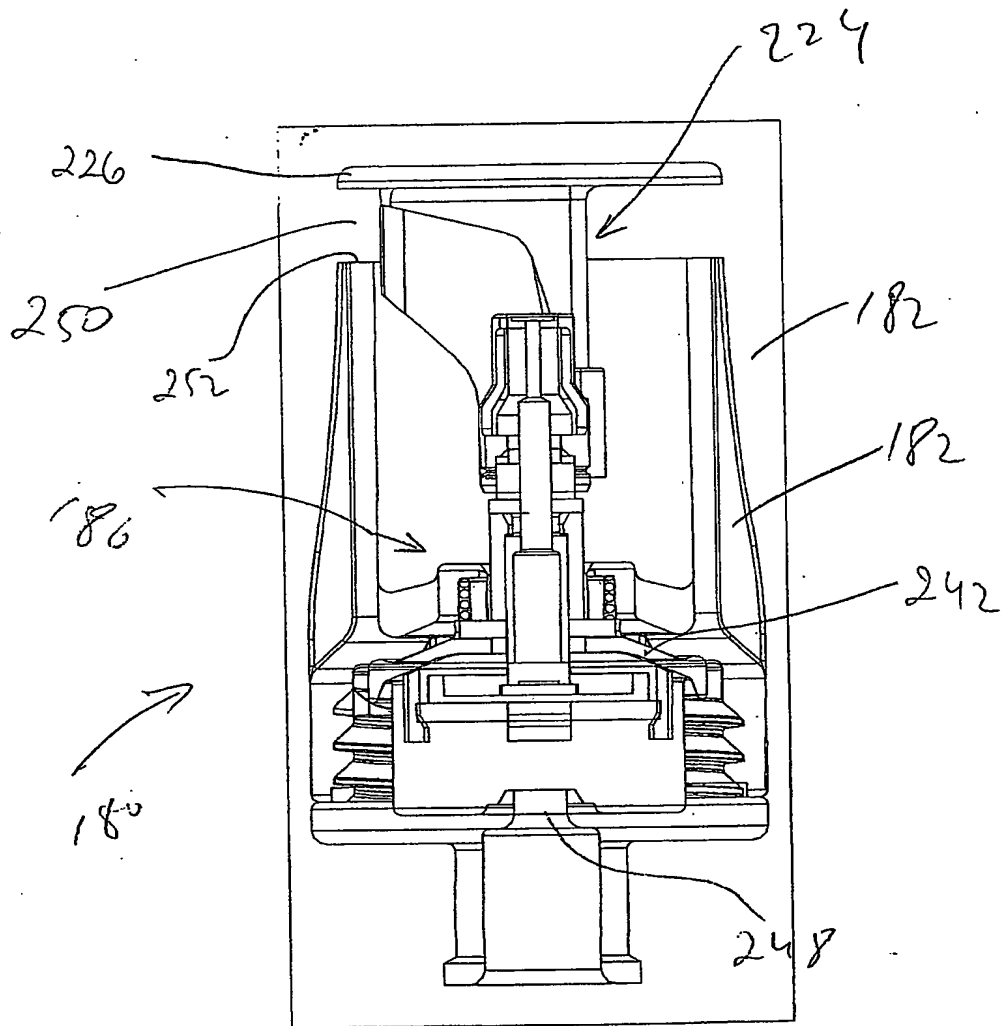


FIG. 6A



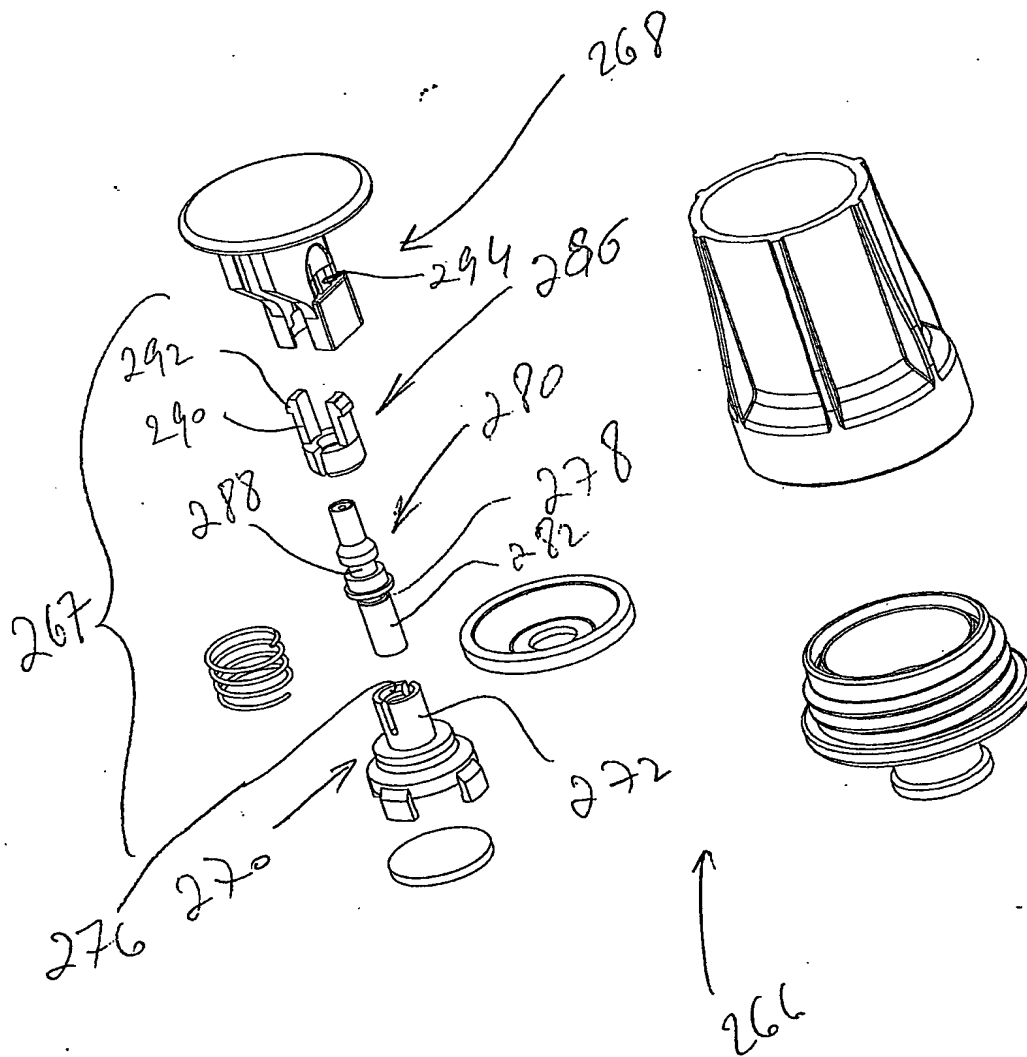


Fig. 6B

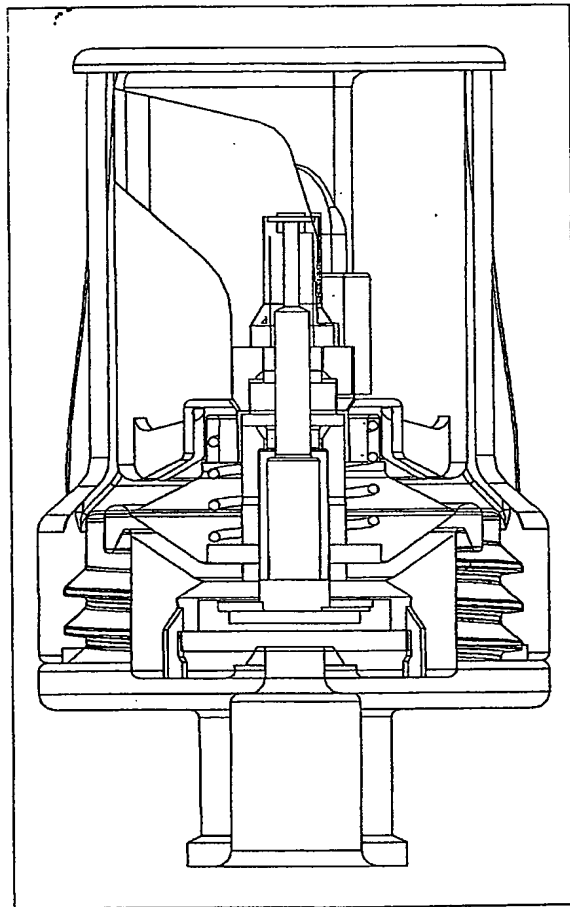

266

Fig. ~~1~~ 6C

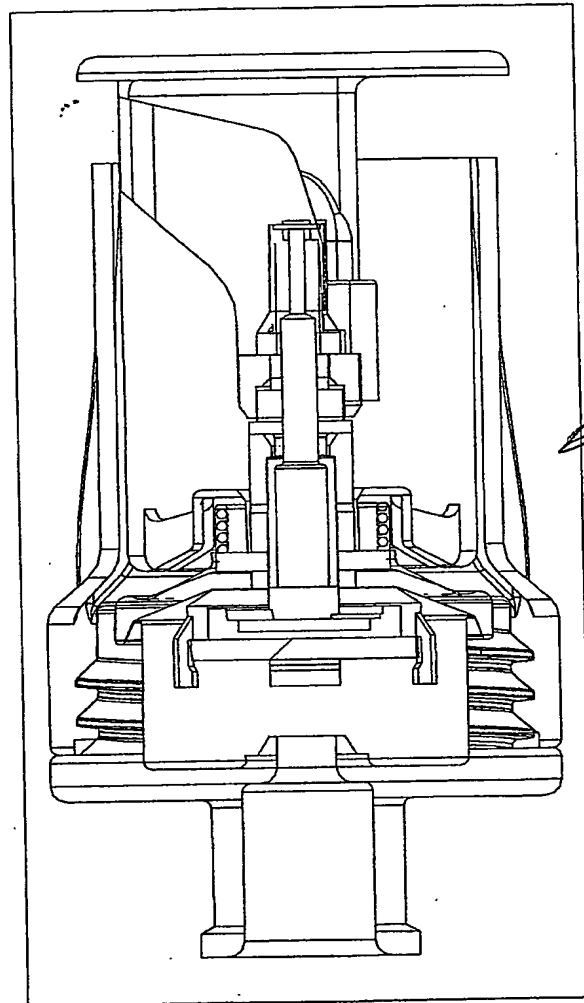

266

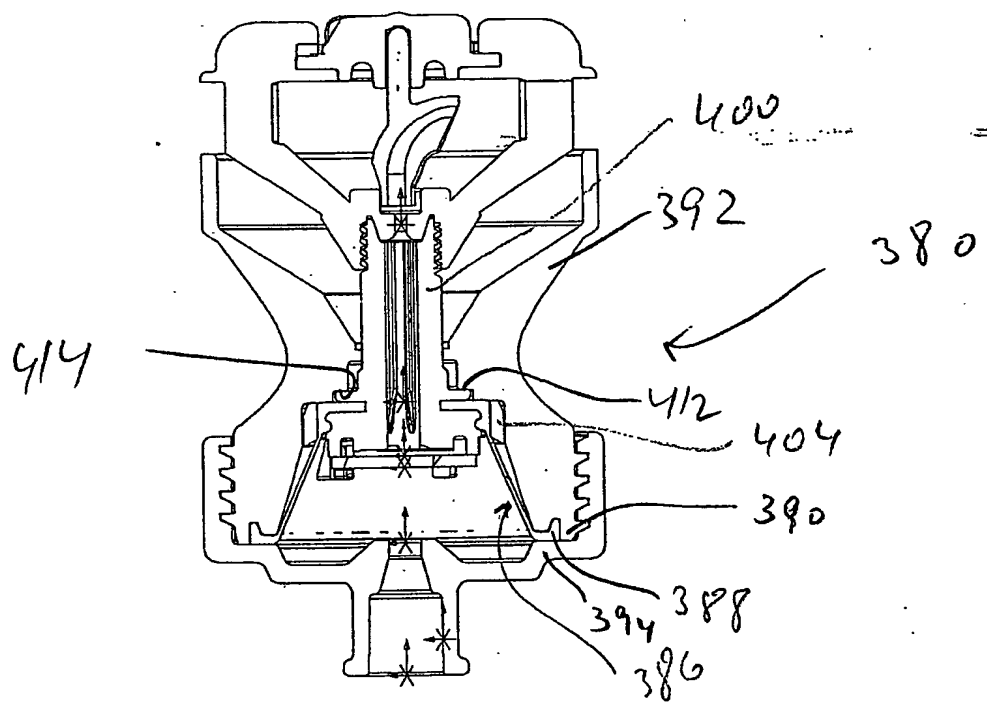


Fig 8B

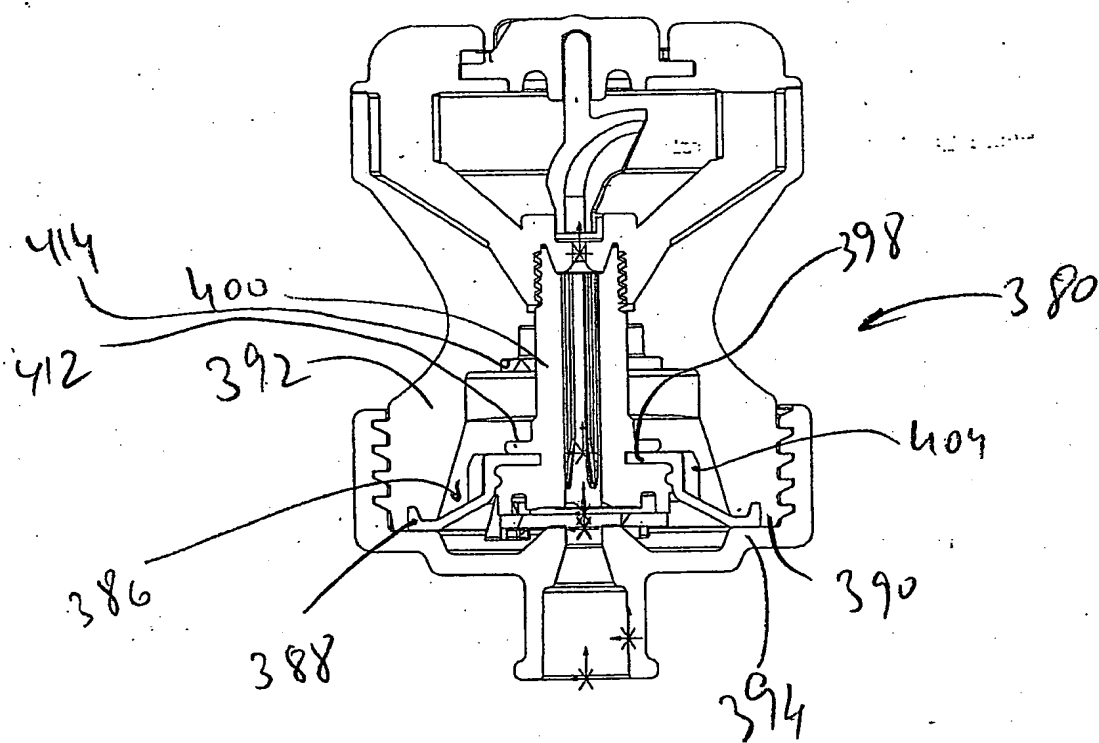


Fig 8A

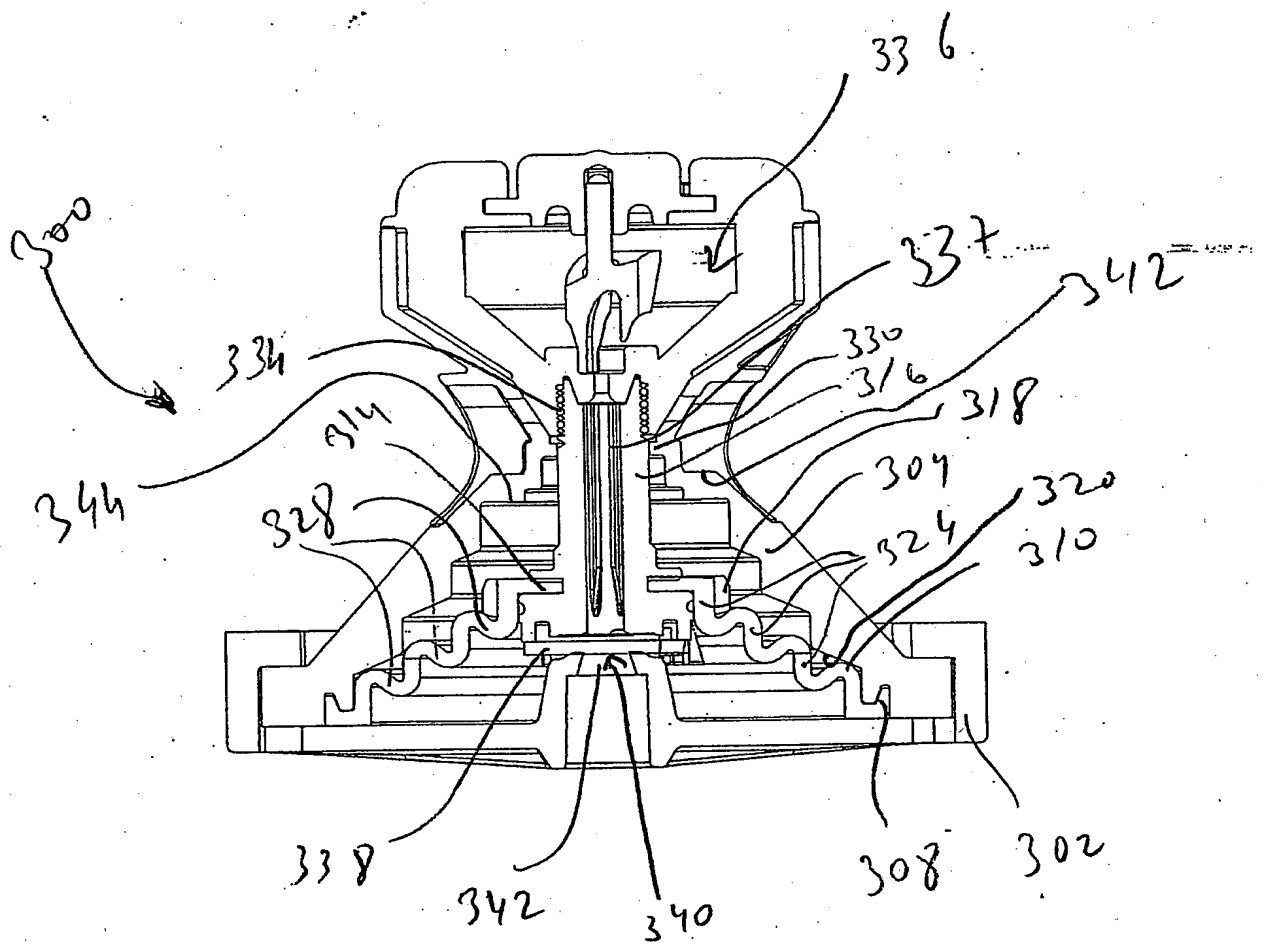


Fig. 7A

2,917,754

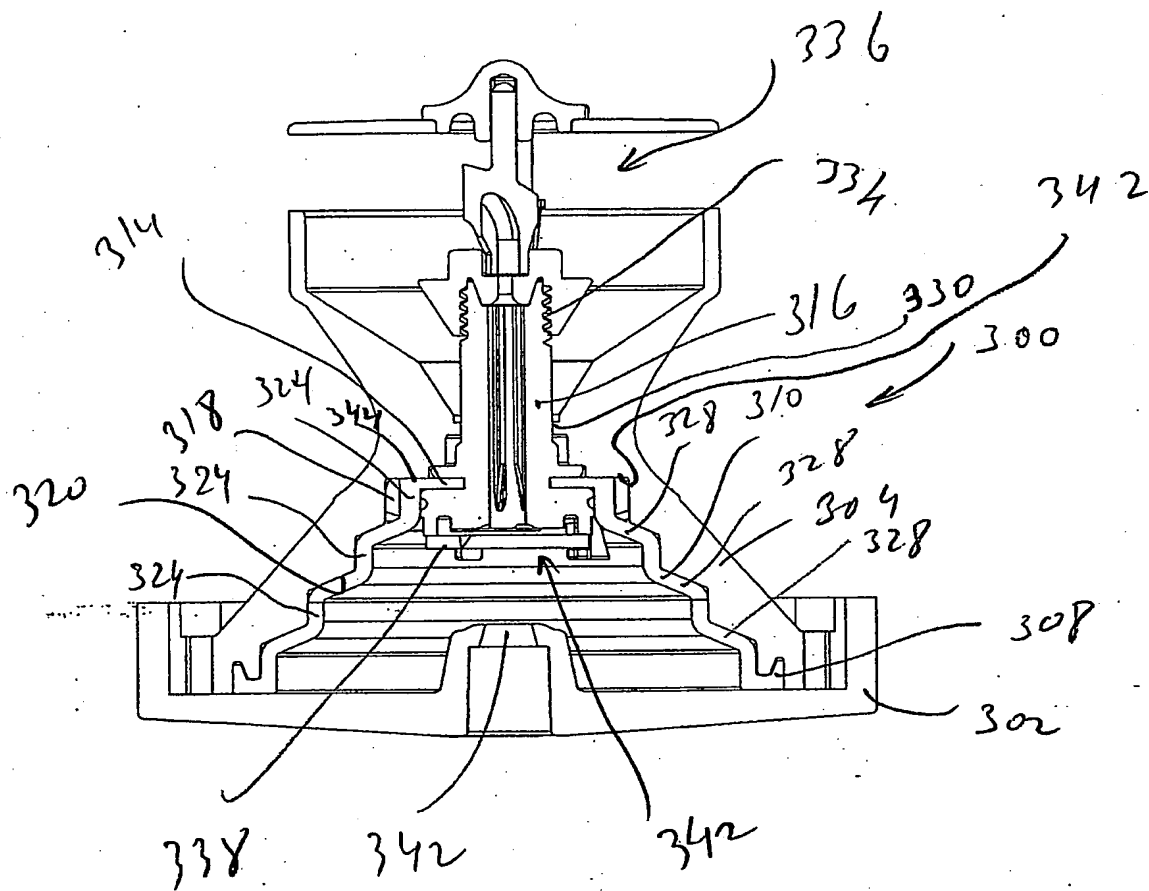


FIG. 7B